

Performance Bulletin

YPB#: PB_SLF_2660CC_t_F250TXRD_2-4-05_OCC

Test Date:

2/4/05



Note: Boat shown with optional out-board motor.




F250TXRD/LF250TXRD

Performance Data

RPM	MPH	GPH	MPG
1000	6.0	3.6	1.69
1500	7.7	4.0	1.93
2000	9.1	6.2	1.47
2500	12.7	8.2	1.54
3000	27.1	10.4	2.61
3500	34.0	14.9	2.29
4000	39.7	18.4	2.15
4500	45.0	23.9	1.88
5000	51.0	29.2	1.75
5500	55.6	38.3	1.45
5950	60.5	42.6	1.42

Seconds to Plane **3.05**

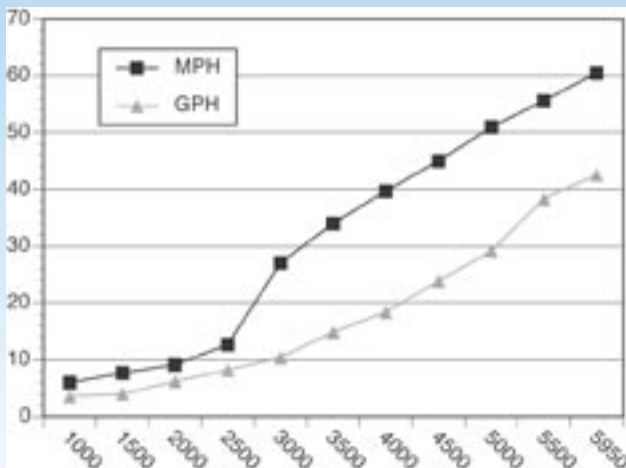

Test performed and certified by Yamaha Application Engineers.

Boat Manufactured By:

Sailfish Boats • Seminole Marine • 2501 Milestone Industrial Park • Cairo, GA 39828
(229) 377-2125 • www.sailfishboats.com

Boat: **2660 CC**

Length	26' 2"
Beam	108"
Dry Weight (published)	4,050 lbs.
Max HP	600
Fuel Capacity	200 gals.
Weight as Tested (approximate)	6,604 lbs.

Engine: F250TXRD/LF250TXRD

Horsepower	250
Fuel Induction	Electronic Fuel Injection
Displacement	204.6 cu. in.
Weight	592 lbs.
Gear Ratio	2.00
Mounting Height	#3
Propeller (Dia/Pitch)	14-1/2 x 23 SWS
Propeller Part #	6R4-45974-A0-00 6R1-45974-A0-00

Test Conditions:

Number of People	2
Air Temperature	65° F
Water Temperature	72° F
Elevation	78'
Wind Velocity	0-5 MPH

Comments:

Test weight includes 1/2 tank of fuel, four batteries, T-top, leaning post/baitwell, safety and test equipment.

Note:

Data may vary due to changes in weather, elevation, options and equipment, load and boat bottom conditions. Fuel data gathered with Yamaha Fuel Management System. Speed data gathered with GPS receiver.

Outboard Manufactured By:

Yamaha Motor Corp., USA • OEM Division, Marine Group
1270 Chastain Road NW • Kennesaw, GA 30144
(800) 88-YAMAHA

For other Performance Bulletins, visit www.yamaha-motor.com.